
**Project** Date Type RIO - Light Pole - Line Voltage Driver - LED High-Power - Aluminum - Square - Square Straight Steel Pole 4" - Cap C - 4 Fixtures - Spiral - Height: 12"

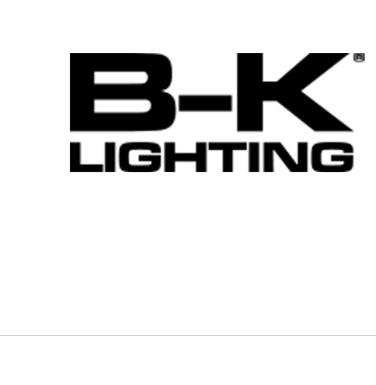

120V, 120-277V

CCT CRI -

**Delivered** 

**THD** 

(%)

**Power Factor** 

Lumens (Lm)

INPUT POWER (W) -

**Operation Ambient** 

**Temperature** 

**CBCP** 

MacAdam

Ellipses (SDCM)

InRush

THD (%) Operation Ambient Temperature

Current

Operating

Output

Current

Current (mA)

L70

**Output Power** 

**Output Current** 

(Max-W)

(Hours)

L90B10

(Hours)

**Output Voltage** 

Circuit Breaker

(Range)

**IES** 

File

Diagram

CONE

Dimming

Min Load (W)

Updated 05/30/2024

(Range)



**Light Source** 

**Technical** 

**Delivered Lumens:** 

Input voltage:

LIGHT SOURCE -OPTIC -**Clear Filters** 

Light Source

Input Optic CRI Power (W)

**Drivers** 

INPUT POWER (W) -

MAX LOAD (W) -

Input Voltage

CONTROL -**Clear Filters** 

Input Power Input **Power Control** (W) Voltage **Factor** 

CONTROL -**Clear Filters** 

**Finishes** 

**Options** 

Control Max Load (W)

Transformer

Accesory

Mountings

Mountings With A Power Supply

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to