
Project Date Type RIO - Light Pole - Line Voltage Driver - LED High-Power - Aluminum - Square - Square Straight Steel Pole 4" - Cap E - 2 Fixtures - Spiral - Height: 20"

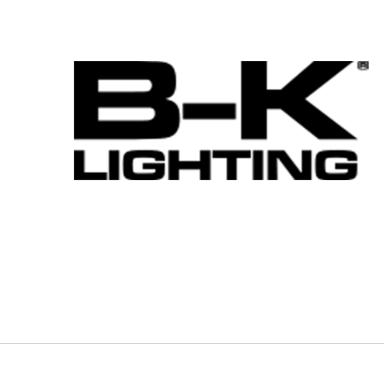

120V, 120-277V

CCT CRI -

Delivered

THD

(%)

Power Factor

Lumens (Lm)

Input

Power

INPUT POWER (W) -

Operation Ambient

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

THD (%) Operation Ambient Temperature

Current

Operating

Output

Current

Current (mA)

L70

Output Power

Output Current

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Circuit Breaker

(Range)

IES

File

Diagram

CONE

Dimming

Min Load (W)

Updated 05/30/2024

(Range)



Light Source

Technical

Delivered Lumens:

Input voltage:

LIGHT SOURCE -OPTIC -**Clear Filters**

Light Optic

Source

CRI Power (W)

Drivers

Clear Filters

Control

INPUT POWER (W) -CONTROL -

> (W) Voltage **Factor**

> > MAX LOAD (W) -

Input Voltage

Input Power Input

CONTROL -**Clear Filters** Control Max Load (W)

Finishes

Options

Transformer

Accesory

Mountings

Mountings With A Power Supply

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com