

STEP STAR - Wall Recessed - Low Voltage Driver - LED High-Power - Brass - Round - Core Drill - Faceplate: Standard - Pattern A



Technical

Delivered Lumens: -
Input voltage: 120V, 120-277V

Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
	(°)	2700	Ra > 80, R9 > 15				2					
	(°)	3000	Ra > 80, R9 > 15				2					
	(°)	4000	Ra > 80, R9 > 15				2					
	(°)	1500	-				2					
	(°)	2700	Ra > 90, R9 > 50				2					
	(°)	3000	Ra > 90, R9 > 50				2					
	(°)	3500	Ra > 80, R9 > 15				2					

Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)

Transformer

Clear Filters


Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
NON	20							
NON	10							
ELV, NON	60		95		1000		1000	1000
NON	75		95		1000		1000	1000

Finishes


STANDARD FINISHES



BRASS FINISHES

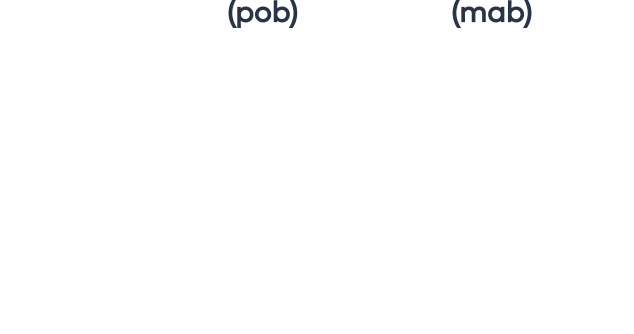

PREMIUM FINISHES

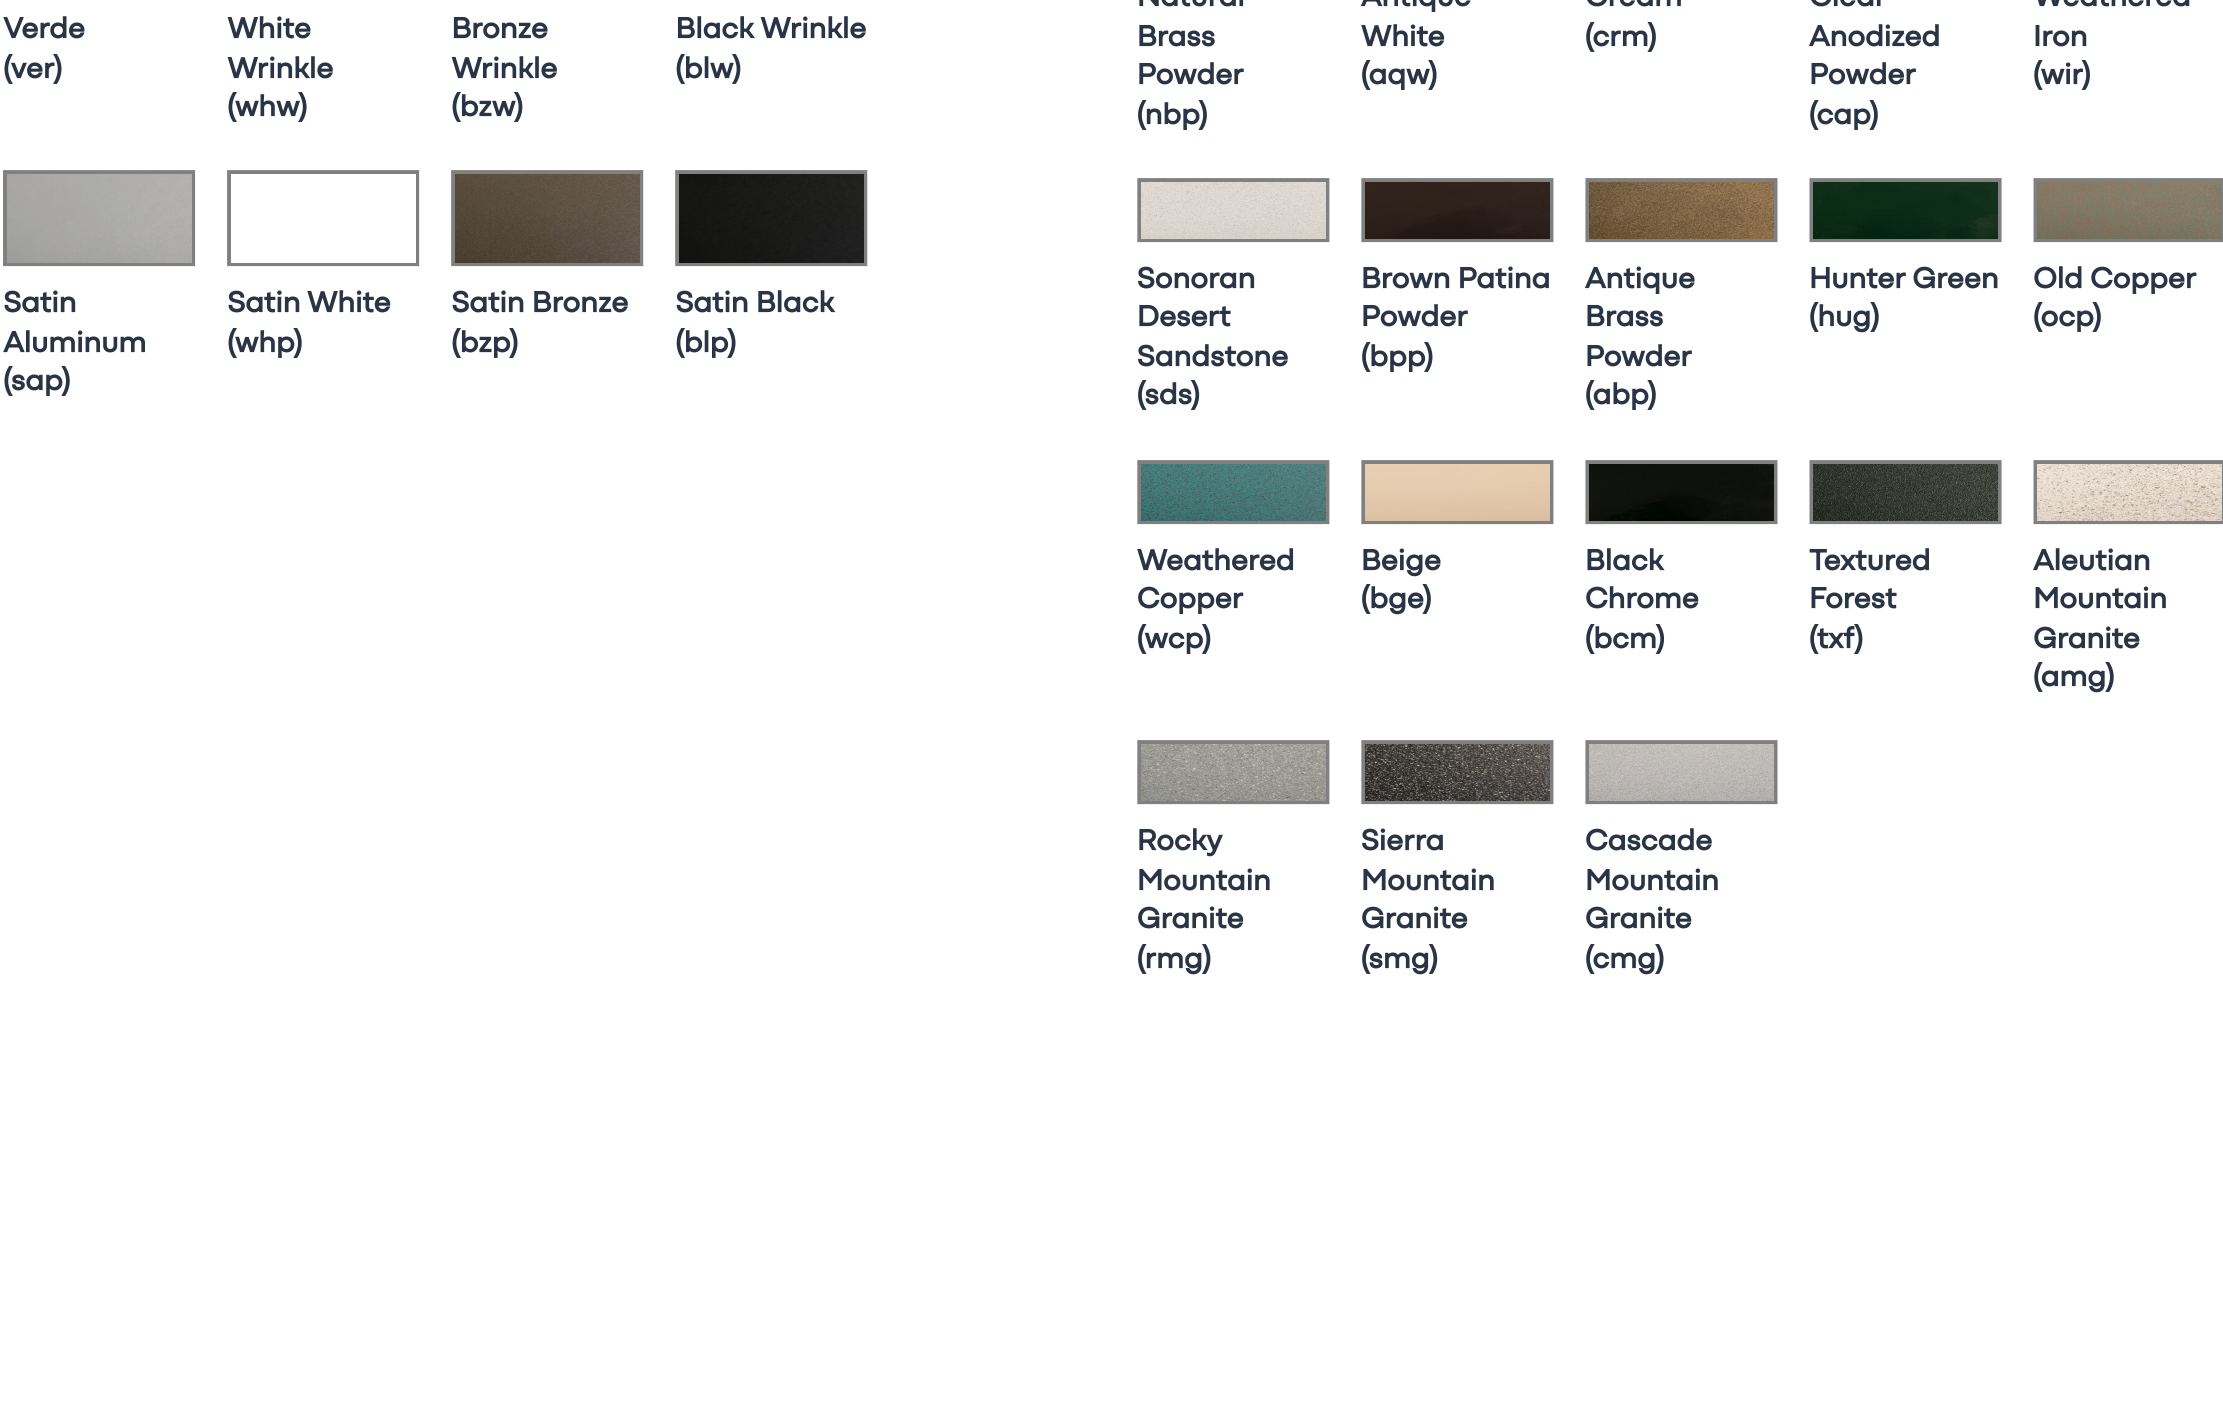

RAL COLORS



Options

	RAL 2008 (ral-2008)
--	---------------------

Accessory

Mountings

Mountings With A Power Supply