


DENALI - Floodlight - Line Voltage Driver - LED COB - Aluminum - Cap A


[Document: Spec Sheet Accessory](#)


RoHS

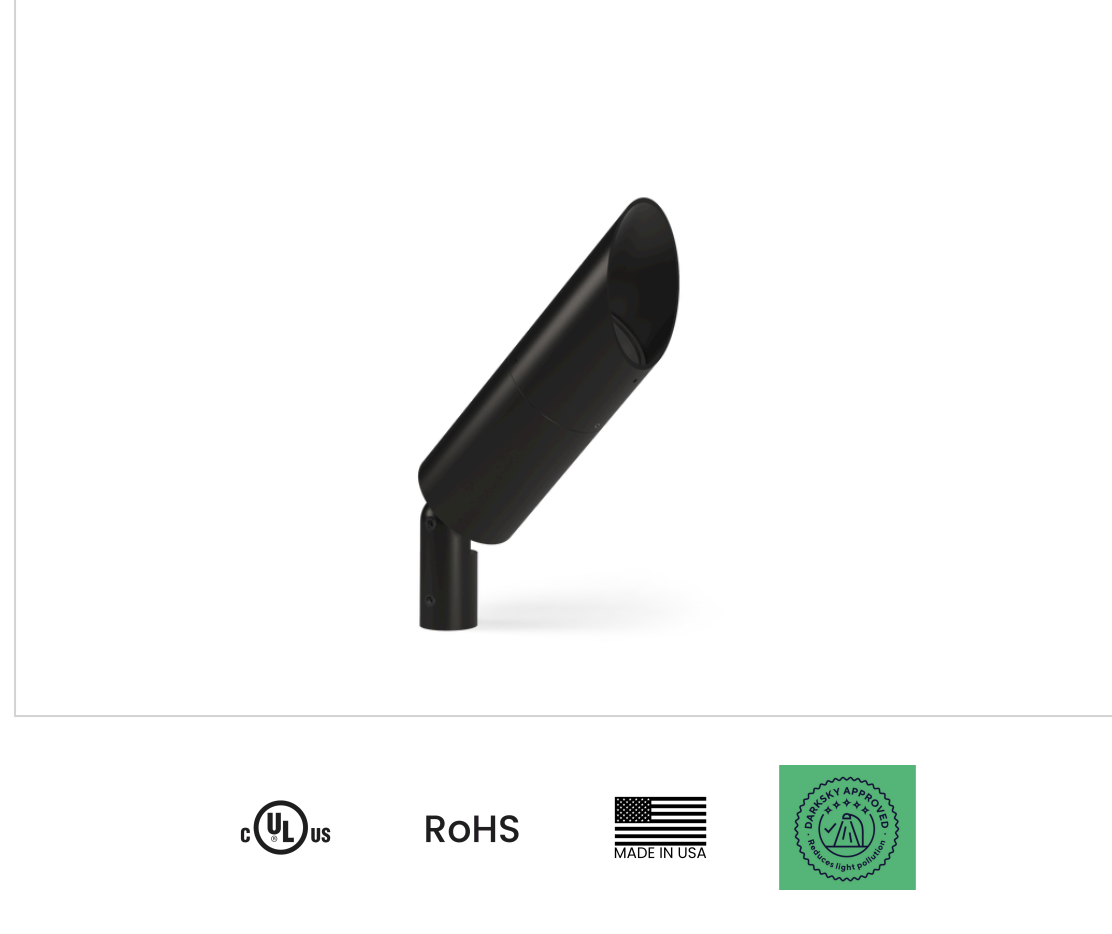

Technical

- **CCT(K):** 2700, 3000, 4000, 3500
 - **CRI:** Ra > 80, R9 > 15, Ra > 90, R9 > 50, Ra > 80, R9 > 15
 - **Input Power:** 13, 21
 - **Beam Angle:** 17, 45, 55
 - **Delivered Lumens:** 574 - 1634
 - **Control:** Non Dimming, ELV Dimming (For use with Electronic Low Voltage Dimmer), 0-10V
 - **Lens:** Clear (Standard), Soft Focus, Rectilinear
 - **Shielding:** Not included (Standard), Honeycomb Baffle
 - **Adjustable output:** A9 (Standard), A8, A7, A6, A5, A4, A3, A2, A1
 - **Wiring length:** 5 Ft Leads, 25 Ft Leads
 - **Option:** Concrete Pour Collar, Pad Lock Cover
 - **Accessory:** Cutoff Visor - Saratoga, Cutoff Snoot - Saratoga
 - **Weight:** 2.96
 - **Source to lens distance:** 1.45
 - **Input voltage:** 120-277V, 120V
 - **IP Rating:** IP66
- **Certification:** UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards., RoHS compliant components.,

Finishes

STANDARD FINISHES



PREMIUM FINISHES



RAL COLORS

