
ARTI STAR - Tree Mount - Line Voltage Via Transformer - LED High-Power - Aluminum - Cap F - 4 Fixtures @ 90° - Strap: 26" Min. To 32" Max. Tree Diameter



Mountings With A Power Supply

manufacture, use or sell anything it may describe.

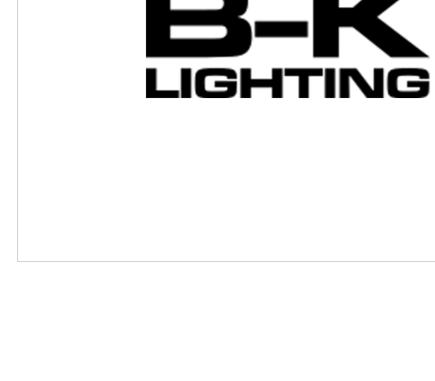

Technical								
Input voltage:	120V, 120-277V							
Light Source								
LIGHT SOURCE -	OPTIC -	CCT CRI ▼	NPUT POWER (W)	,				
Clear Filters								
Light Optic Source	CRI P	put Deliver ower Lumen	(-12(-1)	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 IES (Hours) File	_
Drivers								
	NPUT POWER (W)	•						
Clear Filters Control Input Power (W)	Input Pov Voltage Fac		Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
Clear Filters Control Max Load NON 20 NON 10 NON 75 ELV, NON 60 Finishes	d (W) Input Volta	95	or THD (%) Ope	eration Ambient Te	emperature	Output Current	Circuit Breaker	Min Load (W)
Options								
Accesory								
Mountings								

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to

Updated 05/25/2024