


ARTI STAR - Floodlight - Line Voltage Driver - Lamp MR16 Gu10 - Brass - Anchor Base - Cap D - Height: 24"

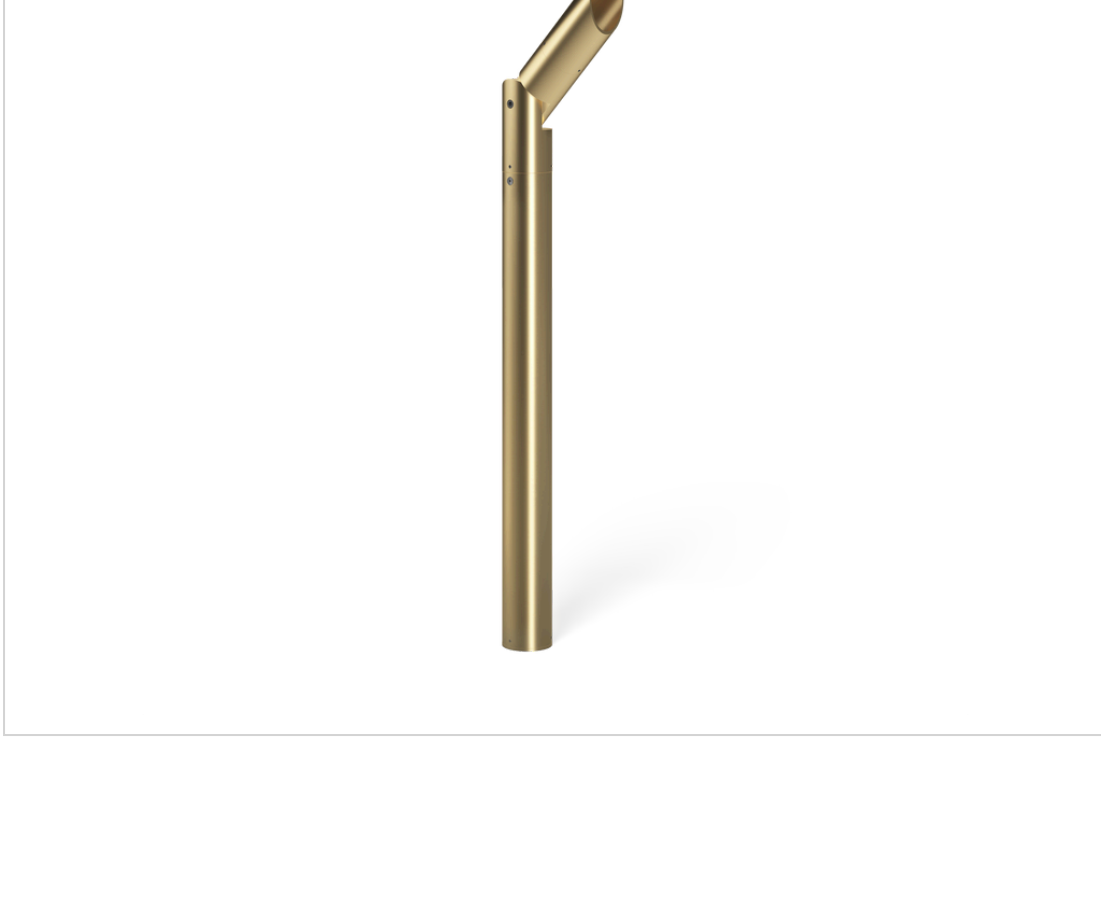

Technical

Delivered Lumens:

Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
--------------	-------	---------	-----	-----------------	-----------------------	------	-------------------------	------------------------	-------------	----------------	----------	--------------

Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
---------	-----------------	---------------	--------------	---------	-------------------------------	----------------	----------------	----------------------	------------------------	-----------------

Transformer


Clear Filters

Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
---------	--------------	---------------	--------------	---------	-------------------------------	----------------	-----------------	--------------

NON 20
NON 10
NON 75
ELV, NON 60

Finishes

STANDARD FINISHES

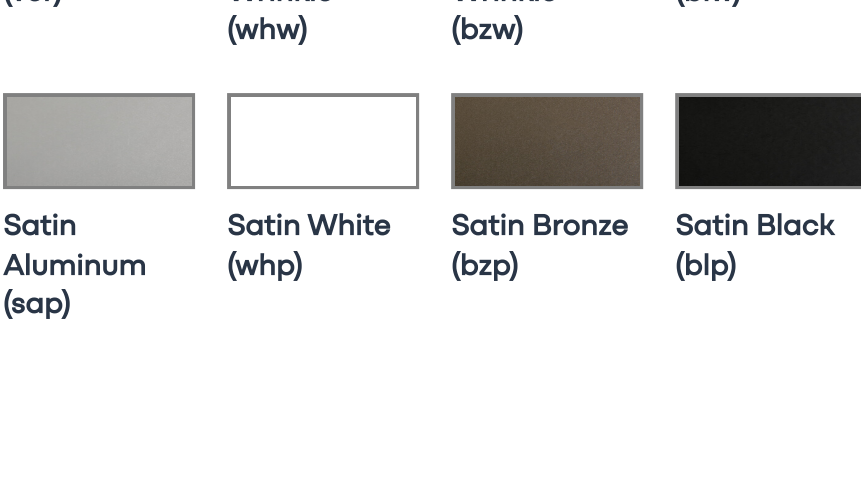


BRASS FINISHES



PREMIUM FINISHES



RAL COLORS

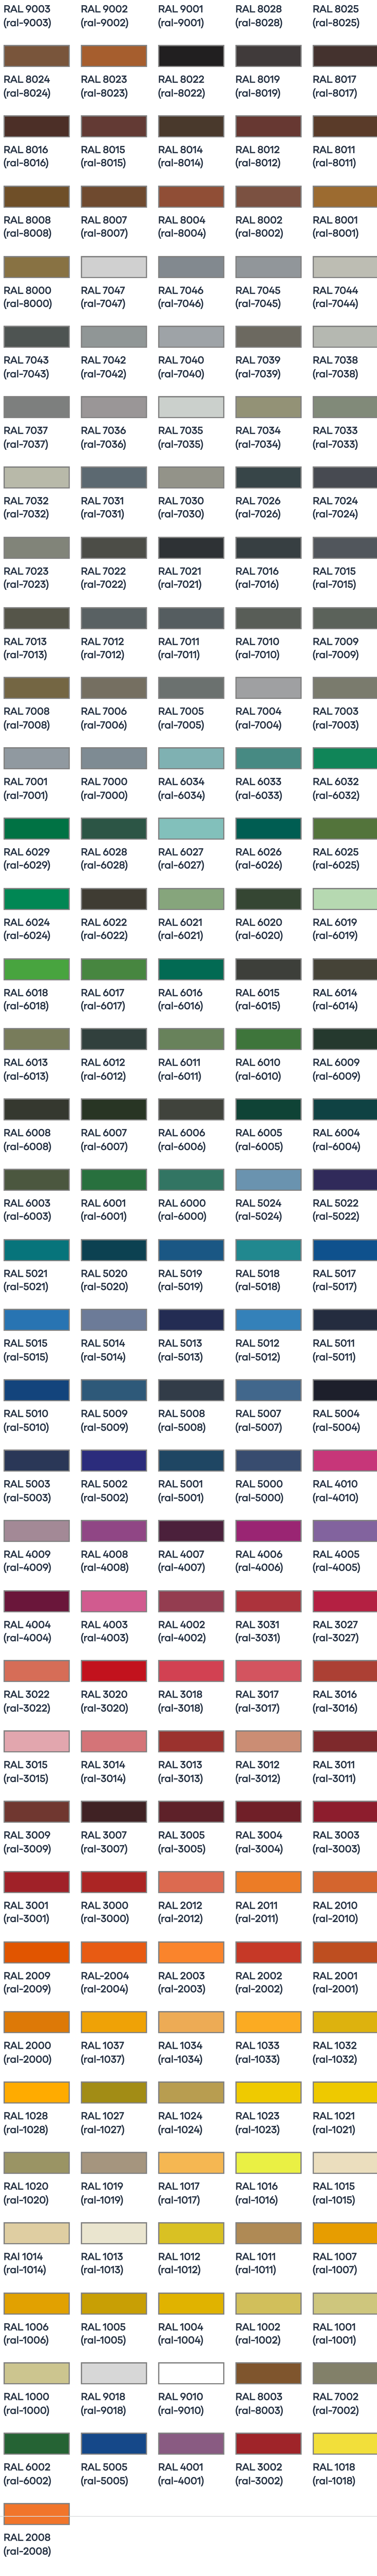

Options

RAL 2008 (ral-2008)

Accessory

Mountings

Mountings With A Power Supply