

# ARTI STAR - Floodlight - Line Voltage Driver - Lamp MR16 Gu5.3 - Brass - Anchor Base - Cap E - Height: 6"



## Technical

Delivered Lumens:

## Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
--------------	-------	---------	-----	-----------------	-----------------------	------	-------------------------	------------------------	-------------	----------------	----------	--------------

## Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
---------	-----------------	---------------	--------------	---------	-------------------------------	----------------	----------------	----------------------	------------------------	-----------------


## Transformer

Clear Filters


Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
NON	20							
NON	10							
NON	75							
ELV, NON	60			95				

## Finishes

### STANDARD FINISHES

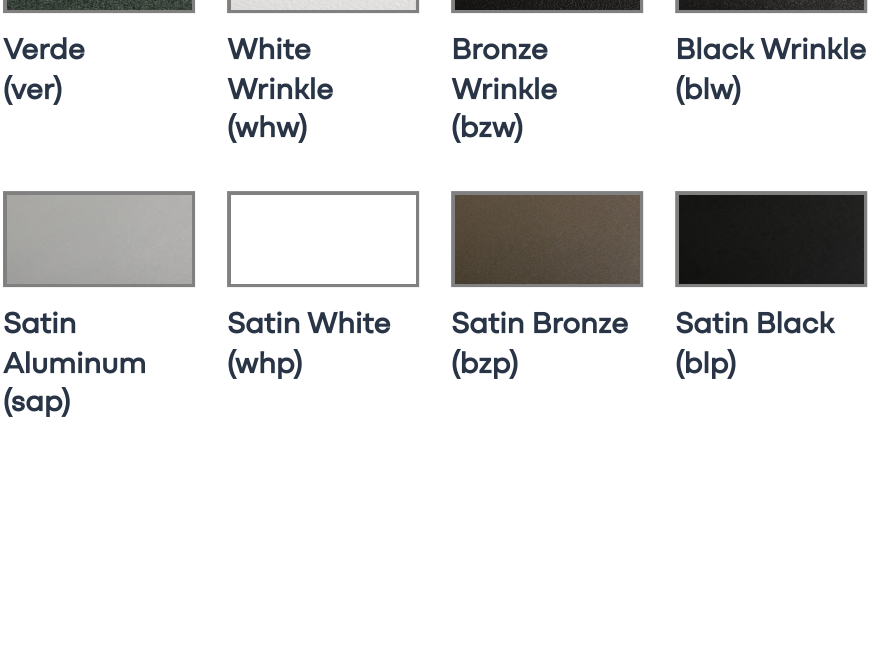


### BRASS FINISHES

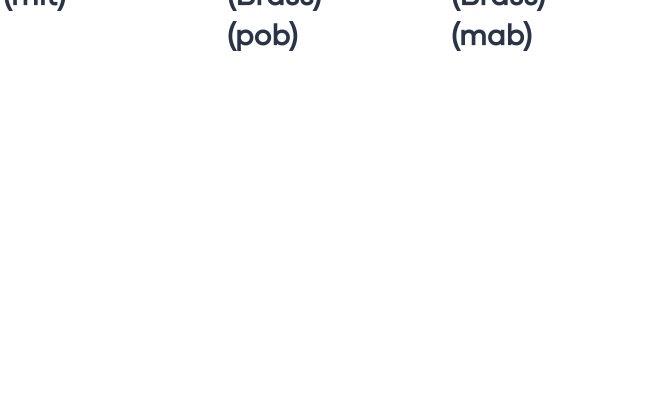

### PREMIUM FINISHES



### RAL COLORS

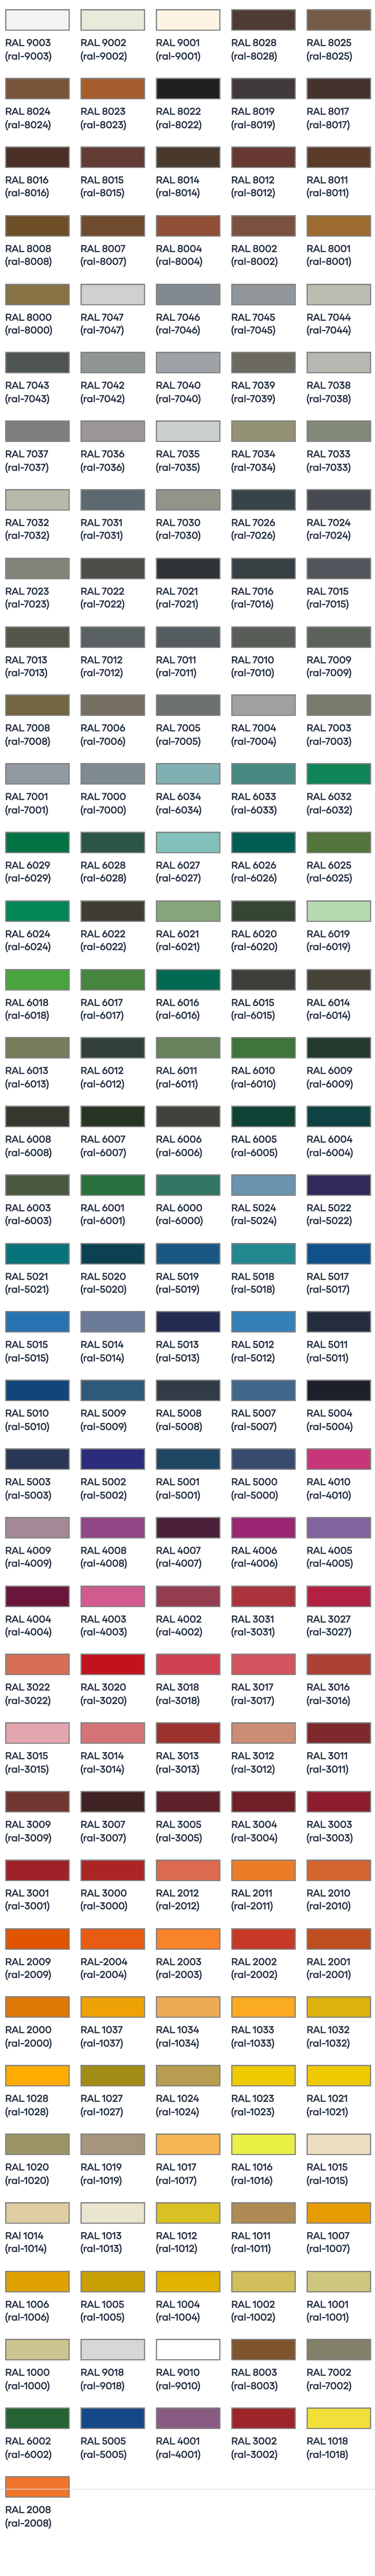

## Options

RAL 2008 (ral-2008)

## Accessory

## Mountings

## Mountings With A Power Supply