Project Type Date ARTI STAR - Floodlight - Line Voltage Driver - Lamp MR16 Gu10 - Brass - Anchor Base - Cap F - Height: 24"

INPUT POWER (W) -

Operation Ambient

Temperature


CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

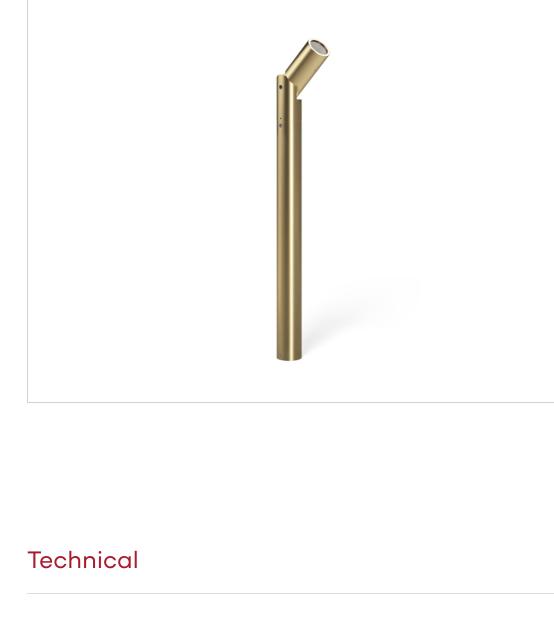



Diagram

CONE

Dimming

(Range)

IES

File

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)

L90B10

(Hours)

Output Voltage

Output Current Circuit Breaker Min Load (W)

(Range)

LIGHT SOURCE -

Clear Filters

Light

Light Source

Source

Clear Filters

Control

Drivers CONTROL -

(W)

Transformer

CONTROL -

Max Load (W)

20

10

75

Clear Filters

Control

NON

NON

NON

ELV, NON 60

Finishes

Options

Accesory

Mountings

Optic

INPUT POWER (W) -Input Power Input Voltage

OPTIC -

CRI

CCT

CCT CRI -

Delivered

Lumens (Lm)

Input

Power

(W)

Factor MAX LOAD (W) -

Power

THD

(%)

Input Voltage Power Factor THD (%) Operation Ambient Temperature

95

manufacture, use or sell anything it may describe.

Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/28/2024