Project Type Date ARTI STAR - Wall Mount - Line Voltage Via Transformer - LED High-Power - Aluminum -Surface Mount - Cap C - Height: 12"

INPUT POWER (W) -

Operation Ambient

Power Factor THD (%) Operation Ambient Temperature

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

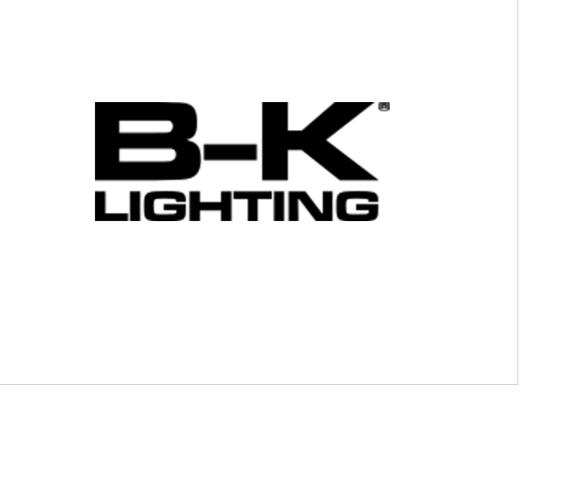

CCT CRI ▼

Delivered

THD

(%)

Lumens (Lm)



Diagram

CONE

Dimming

Min Load (W)

Updated 05/26/2024

(Range)

IES

File

Light Source

Technical

Input voltage:

LIGHT SOURCE -OPTIC -

120V, 120-277V

Clear Filters

Input Light CCT Power Optic CRI Source

(W)

Drivers

CONTROL -INPUT POWER (W) -**Clear Filters**

Input Power Input Power **Control** (W) Voltage **Factor**

Max Load (W)

MAX LOAD (W) -

Input Voltage

95

CONTROL -**Clear Filters**

Control

NON

NON

NON

Transformer

20 10 75

ELV, NON 60 **Finishes**

Options

Accesory

Mountings

Mountings With A Power Supply

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

manufacture, use or sell anything it may describe.

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to