Project Type Date ARTI STAR - Wall Mount - Low Voltage Driver - LED High-Power - Aluminum - Surface Mount - Cap D -Height: 12"

INPUT POWER (W) -

Operation Ambient

Temperature

CBCP

MacAdam

Ellipses (SDCM)

InRush

Current

THD (%) Operation Ambient Temperature

Delivered

THD

(%)

Power Factor

95

Factor

Lumens (Lm)

Operating

Output

Current

Current (mA)

L70

Output Power

(Max-W)

(Hours)


L90B10

(Hours)

Output Voltage

(Range)

Output Current Circuit Breaker

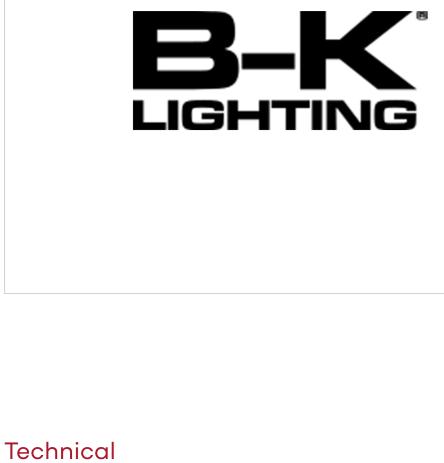



Diagram

CONE

Dimming

Min Load (W)

(Range)

IES

File

Input voltage:	120V, 120-277V
Light Source	

LIGHT SOURCE -OPTIC -CCT CRI ▼

Clear Filters Input Light CCT Optic CRI Power

Source (W)

Drivers

CONTROL -INPUT POWER (W) -

Clear Filters

(W)

Input Power Input **Power Control**

Voltage

MAX LOAD (W) -

Input Voltage

Transformer CONTROL -

Clear Filters

NON

Max Load (W) **Control** NON 20 NON 10

75 ELV, NON 60

Finishes

Options Accesory

Mountings With A Power Supply

Mountings

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

Updated 05/28/2024