
CAMINO STAR - Bollard - Low Voltage Driver - LED High-Power - Brass - Anchor Base - Style C -Height: 12"



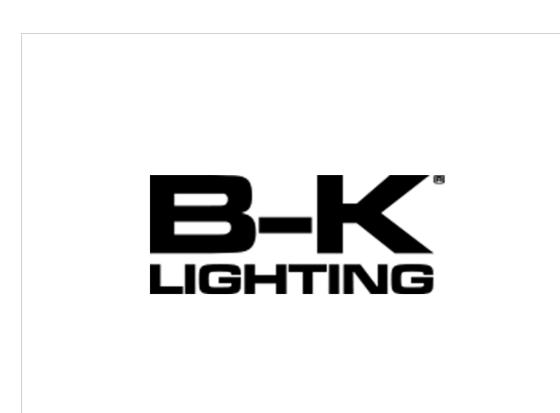

## Technical

**Input voltage:** 120V, 120-277V

## Light Source

LIGHT So Clear Filte		OF		CCT CRI		OWER (W)	•					
Light Source	Optic	ССТ (К)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE

## Drivers

CONTI		NPUT POWE	R (W) 👻							
Clear Filt	ters									
Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)

## Transformer

Control	Max Load (W)	Input Voltage	<b>Power Factor</b>	THD (%)	<b>Operation Ambient Temperature</b>	Output Current	Circuit Breaker	Min Load (W)
NON	20							
NON	10							
Finish	es							
Optio	ns							
•								
Acces	ory							
Mount	tings							
	Ŭ							

Mountings With A Power Supply

Copyright © B-K Lighting, Inc. | 40429 Brickyard Drive Madera, CA 93636 | MADE IN USA | +1 (559) 438-5800 | info@bklighting.com | bklighting.com

This document contains proprietary information of B-K Lighting, inc. and its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe.

Technical information is subject to change at the discretion of B-K Lighting Inc. For the most current technical data, please refer to bklighting.com

Updated 05/28/2024