


# DRIVE STAR - In-Grade - Low Voltage Driver - LED High-Power - Aluminum - Faceplate Surface Mount - Style A - 4 Optical Openings - Micro

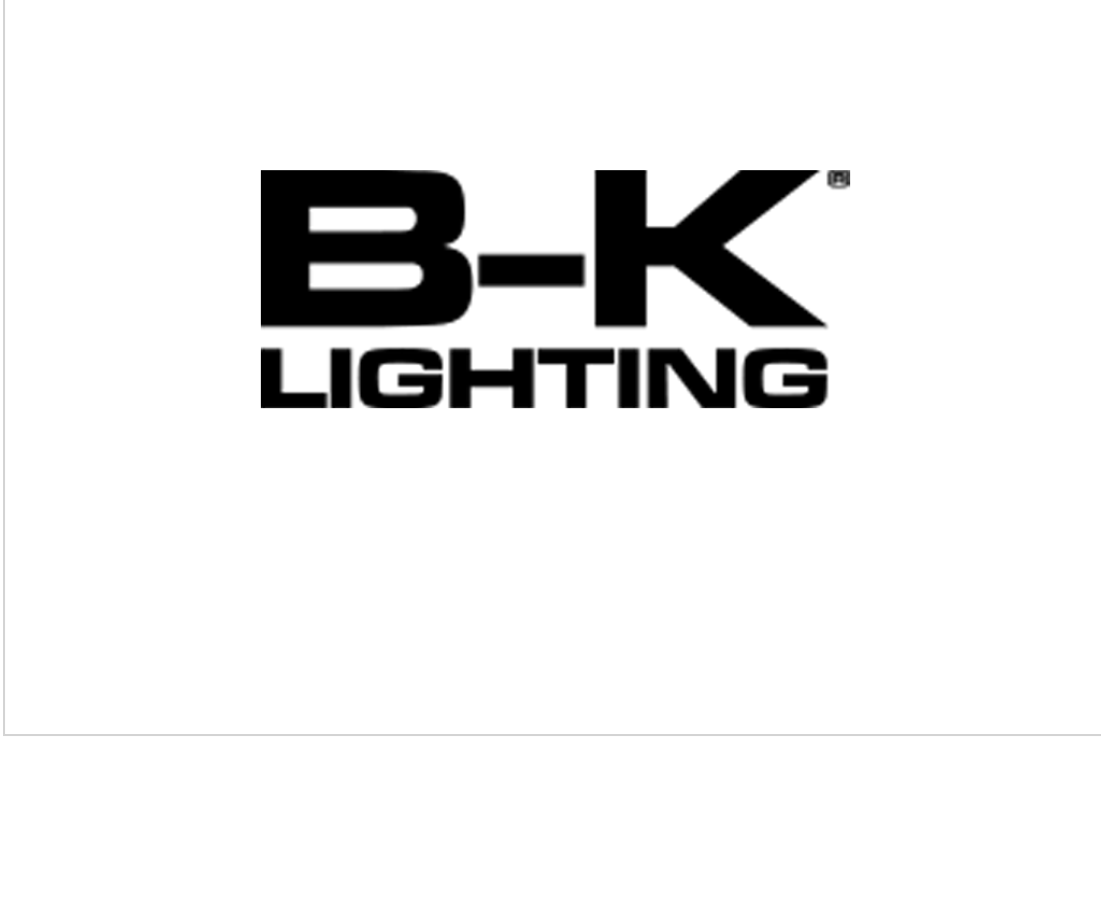

## Technical

Input voltage: 120V, 120-277V

## Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
	(°)	2700	Ra > 80, R9 > 15				2					
	(°)	3000	Ra > 80, R9 > 15				2					
	(°)	4000	Ra > 80, R9 > 15				2					

## Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
---------	-----------------	---------------	--------------	---------	-------------------------------	----------------	----------------	----------------------	------------------------	-----------------

## Transformer

Clear Filters

Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
---------	--------------	---------------	--------------	---------	-------------------------------	----------------	-----------------	--------------

NON 20

NON 10

## Finishes

## Options

## Accessory

## Mountings

## Mountings With A Power Supply