


# MICRO NITE - Floodlight - Low Voltage Driver - LED High-Power - Brass - Threaded Knuckle Mount - Cap C

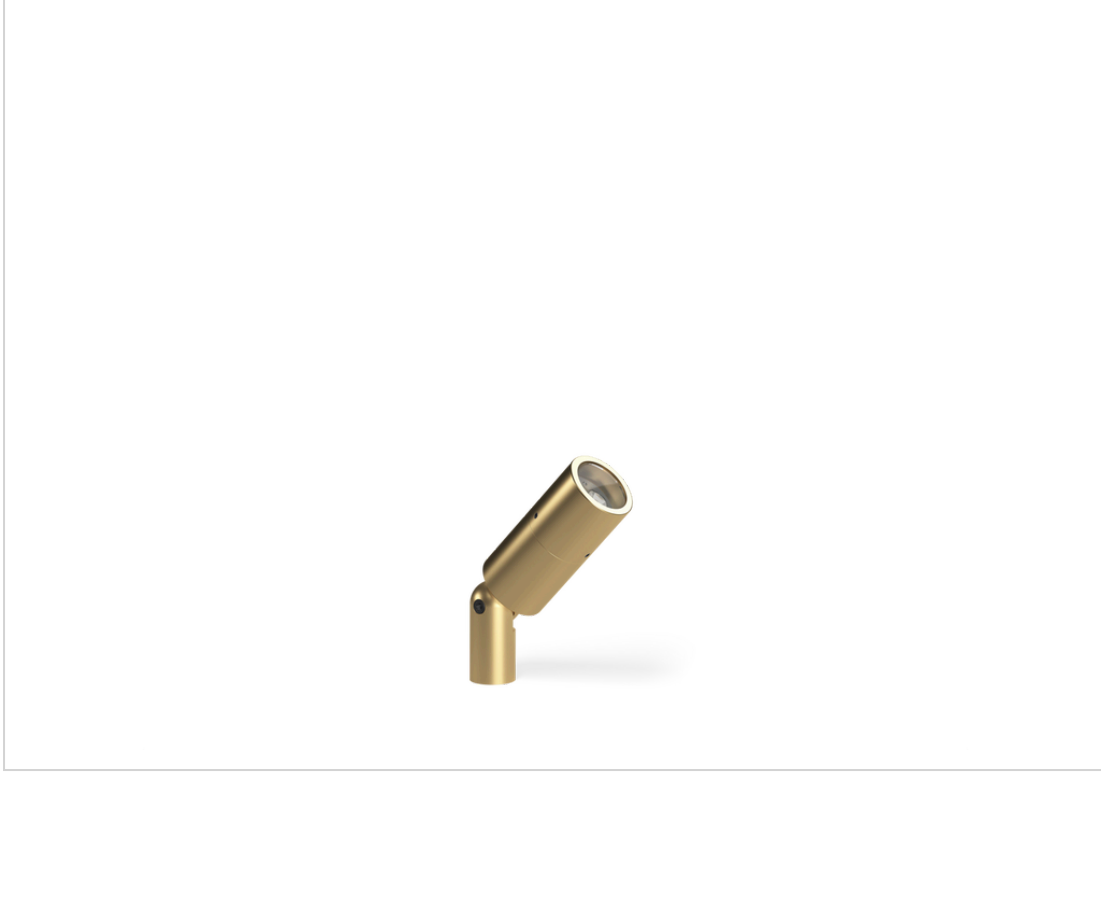

## Technical

<b>CCT(K):</b>	2700, 3000, 4000, 1500
<b>CRI:</b>	Ra > 80, R9 > 15, -, Ra > 90, R9 > 50
<b>Lens:</b>	Clear (Standard), Soft Focus, Rectilinear
<b>Shielding:</b>	Not included (Standard), Honeycomb Baffle
<b>Wiring length:</b>	5 Ft Leads, 25 Ft Lead
<b>Input voltage:</b>	120V, 120-277V

## Light Source

Clear Filters

Light Source	Optic	CCT (K)	CRI	Input Power (W)	Delivered Lumens (Lm)	CBCP	MacAdam Ellipses (SDCM)	Operating Current (mA)	L70 (Hours)	L90B10 (Hours)	IES File	Diagram CONE
e68	Medium Flood (°)	3000	Ra > 80, R9 > 15				2					
e68	Narrow Flood (°)	3000	Ra > 80, R9 > 15				2					
e68	Spot (°)	3000	Ra > 80, R9 > 15				2					
e69	Medium Flood (°)	4000	Ra > 80, R9 > 15				2					
e69	Narrow Flood (°)	4000	Ra > 80, R9 > 15				2					
e69	Spot (°)	4000	Ra > 80, R9 > 15				2					
e75	Medium Flood (°)	2700	Ra > 80, R9 > 15				2					
e75	Narrow Flood (°)	2700	Ra > 80, R9 > 15				2					
e75	Spot (°)	2700	Ra > 80, R9 > 15				2					
e82	Medium Flood (°)	2700	Ra > 90, R9 > 50				2					
e82	Narrow Flood (°)	2700	Ra > 90, R9 > 50				2					
e82	Spot (°)	2700	Ra > 90, R9 > 50				2					
e83	Medium Flood (°)	3000	Ra > 90, R9 > 50				2					
e83	Narrow Flood (°)	3000	Ra > 90, R9 > 50				2					
e83	Spot (°)	3000	Ra > 90, R9 > 50				2					
e84	Medium Flood (°)	3500	Ra > 90, R9 > 50				2					
e84	Narrow Flood (°)	3500	Ra > 90, R9 > 50				2					
e84	Spot (°)	3500	Ra > 90, R9 > 50				2					
e67	Medium Flood (°)	2700	Ra > 80, R9 > 15				2					
e67	Narrow Flood (°)	2700	Ra > 80, R9 > 15				2					
e67	Spot (°)	2700	Ra > 80, R9 > 15				2					

## Drivers

Clear Filters

Control	Input Power (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	InRush Current	Output Current	Output Power (Max-W)	Output Voltage (Range)	Dimming (Range)
NON	20									
NON	10									


## Transformer

Clear Filters


Control	Max Load (W)	Input Voltage	Power Factor	THD (%)	Operation Ambient Temperature	Output Current	Circuit Breaker	Min Load (W)
NON	20							
NON	10							

## Finishes

### STANDARD FINISHES

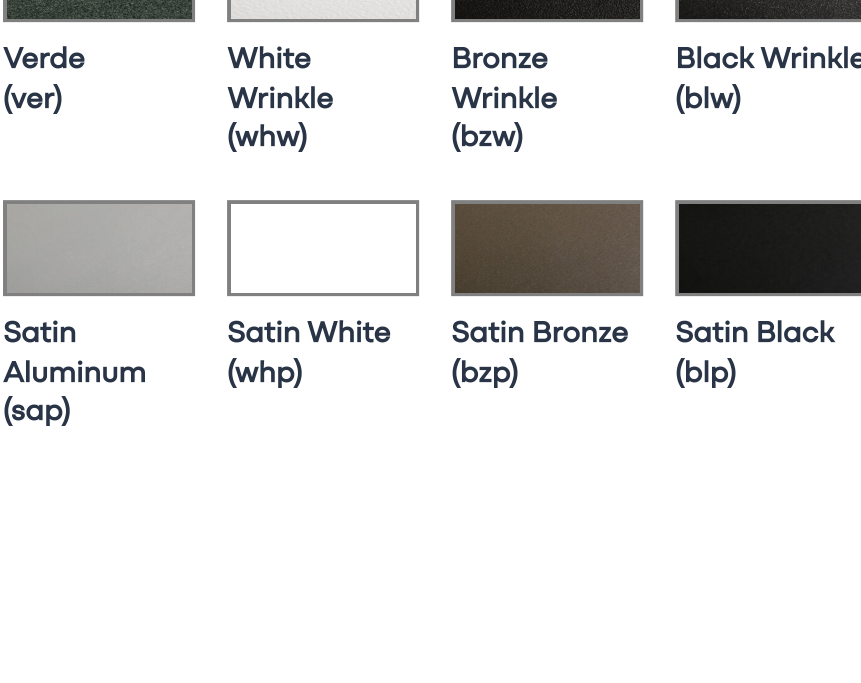

### RAL COLORS

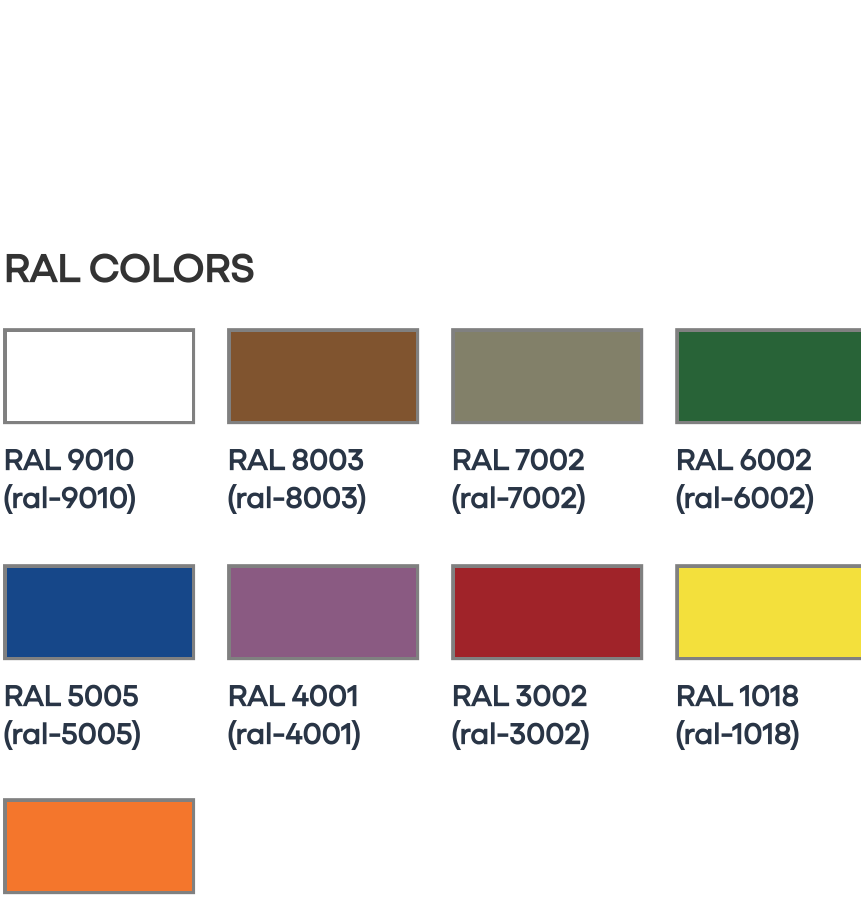

## Options

## Accessory

## Mountings

## Mountings With A Power Supply